


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
1		Drawing Revise	Home	05/08/06	
2		品名、料号增加环保标示(H)	LJH	12/10/07	
3		修改料号及塑件增加防掉脱点	LJH	01/26/08	
4		增加商标、品名及UL、CE刻字	Zengy	09/06/08	
5		增加VDE刻字	Zengy	02/04/09	
6		修改螺丝防脱卡点位置及尺寸	WLM	04/21/09	

认证标志的位置在左右两边都可以
(Approval mark can be printed on left and right end both)

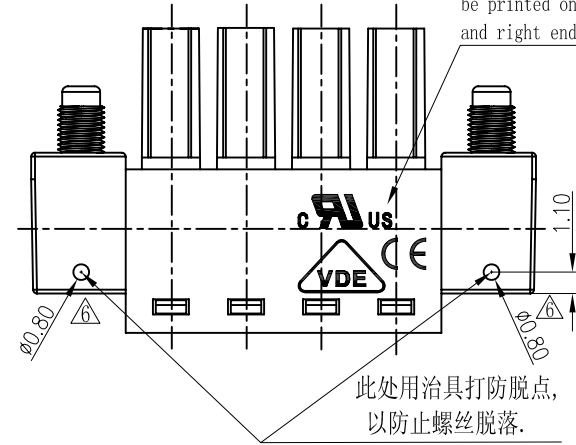

此处用夹具打防脱点, 以防止螺丝脱落.

Notes:

1. Pitch: 3.5mm, Poles: 2-24P
2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1min
5. Insulation Resistance: 5000MΩ / DC1000V
6. Wire Range: 28-16AWG, 0.5-1.5mm²
7. Max. Torque Value: M2, 2.04kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm					
	over 6 to 6	over 10 to 10	over 24 to 30	over 30 to 60	over 60 to 100	over 100 to 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7
						±1.0

ITEM	DESCRIPTION	PART NO.	QTY	MATERIAL	FINISH
6	2EDG "-"Screws	S000000980 (H)	2	steel	Cr ³⁺ Zn
5	15EDG "-"Screws	S000001360 (H)	XX	steel	Cr ³⁺ Zn
4	15EDG Brass cage	X000000010 (H)	XX	Brass	Ni plated
3	15EDG Clamp	1001B00010 (H)	XX	Phosphor Bronze	Ni plated
2	15EDGK-3.5 Cover	1001C0YXXA (H)	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	15EDGKM-3.5-Housing	1014A0YXXA (H)	1	PA66	UL94V-0

MM (INCH)	DFTO Zhuwm	DATE 01/10/05	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD
TOLERANCES EXCEPT AS NOTED	CHKD	DATE	
	MFO	DATE	
	APPVL	DATE	
MM	MATERIAL :		NAME
.0 ±			15EDGKM-3.5-XXP-1Y-00A (H)
.00 ±			DRAWING NO. 15EDGKM-3.5-E01
.000 ±			/PART NO.
ANGLES ± 1'	G.E :		SIZE A3
THIRD ANGLE PROJECTION	FINISH :		REV T6
	SCALE : 1:1		04/21/09
	DO NOT SCALE DRAWING		SHEET 1 OF 1