
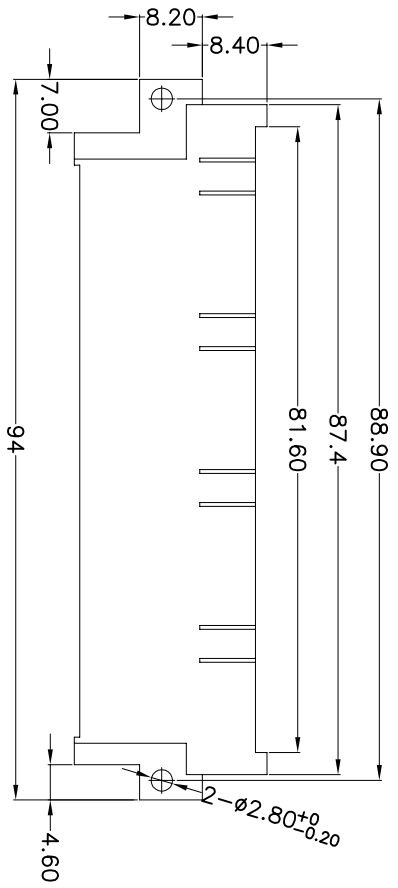


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

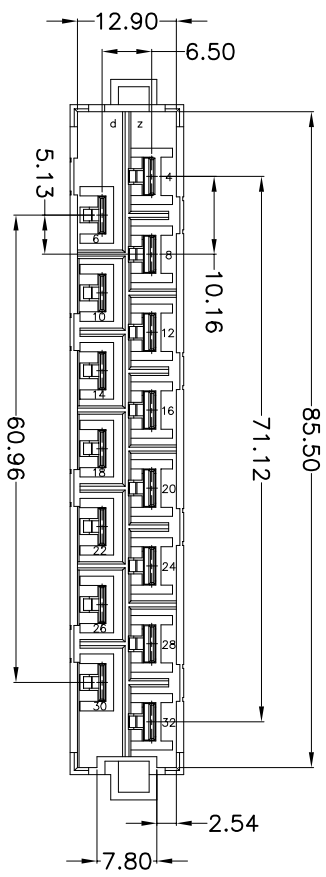

SPECIFICATION
MATERIAL
 Housing: PBT+30%G.F. UL94V-0 Color: Greyish White
 Contacts: Brass
 CONTACT PLATING
 TIN PLATED ON ALL OVER, Ni UNDER PLATED ALL OVER.
 ELECTRICAL
 Current rating: 15 Amps.
 Contact resistance: 30 mΩ initial
 Insulation resistance: 1000000 MΩ min @ 500 VDC
 Dielectric withstanding voltage: 3100 VAC / minute
 Operating temperature: -55° C T0 +125° C

Part no. A05 A - 015 M T R 0 0 0 B
 1 2 3 4 5 6 7 8 9 10

- SERIES NO. R=RIGHT
- TYPE: A=Standard
- CONTACT NUMBER
- CONTACT TYPE: M=Male
- CONTACT AREA PLATING: T=Tin
- FUNCTION OPTION: B=Greyish White
- NO USE
- NO USE
- NO USE
- INSULATOR COLOR: B=Greyish White

PCB LAYOUT(RECOMMENDED)
 (TOP VIEW TOL. :±0.05)

公差一览表
 TOLERANCE UNLESS OTHERWISE

公差	角度	比例	图例	说明
X. ±0.35	X°. 45°	1:1		管正志
.X ±0.30	.X°. ±2°	1:1		管正志
.XX ±0.25	.XX°. ±1°	1:1		管正志
.XXX ±0.02	.XXX°. ±0.5°	1:1		管正志
DATE	2010.04.19	版本	A0	核准 APPD

