
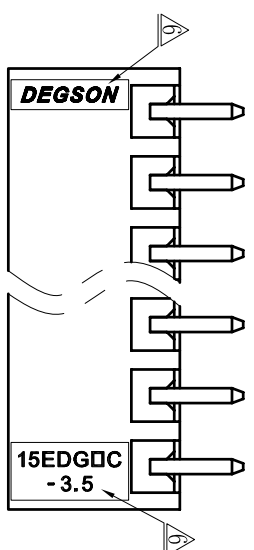
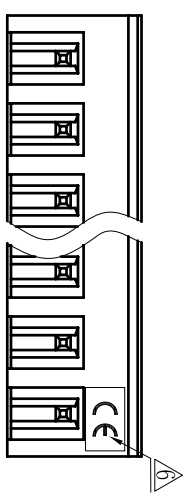


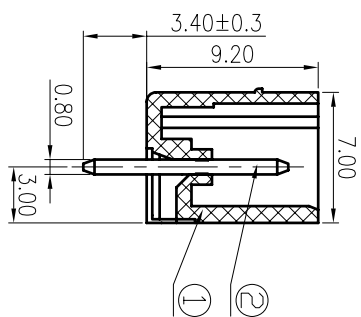
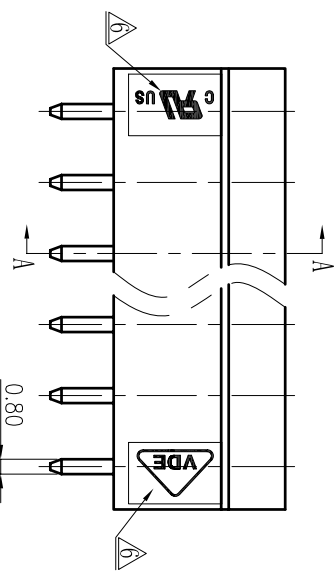


REVISION RECORD			
REV	ECD	DESCRIPTION	DRFT DATE
△		增加U刻字	Ye j 10/16/05
△		更新图面	LjH 03/01/08
△		老模新开更改刻字	WLM 07/14/08
△		增加自动化方针	WLM 10/29/08
△		增加U刻字及底版刻字,4#规格新增	Zen8y 04/11/05

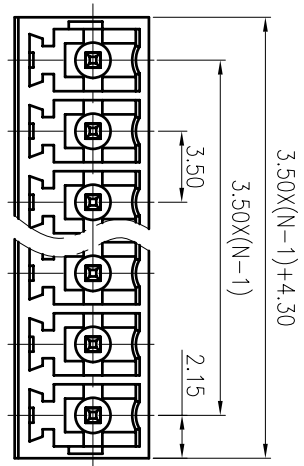

- Notes:
1. Pitch: 3.5mm, Poles: 2-24P
 2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
 3. Operation temperatures: -40°C ~ +105°C
 4. Withstanding Voltage: AC2000V/1Min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm	
over 6	over 30	over 100
to 10	to 60	to 150
to 10	to 100	to 150
to 24	to 60	to 150
±0.10	±0.25	±0.5 ±0.7 ±1.0 ±0.05/10

ITEM	15EDGVC-3.5-Housing	1002A0YXXA (H)	1	PA66	UL94V-0
1	15EDGVC-3.5-Housing	1002A0YXXA (H)	1	PA66	UL94V-0
2	15EDGVC-Pin header	1002B00060 (H)	XX	Brass	Automatic assembly
2	15EDGVC-Pin header	1002B00010 (H)	XX	Brass	Manual assembly

DETACHED LISTS		THIRD ANGLE PROJECTION	
ITEM	NAME OF PART	DRFT Home	DATE
CHKD	MFD	DATE	DATE
APP'VAL	DATE		
MATERIAL :		G/E :	
FINISH :		SCALE : 1:1	
NAME		DRAWING NO. 15EDGVC-3.5-E02	
DEGSON		/PART NO.	
DEGSON ELECTRONICS CO., LTD.		DD NOT SCALE DRAWING	
宁波高正电子有限公司		SHEET 1	
15EDGVC-3.5-XXP-1Y-00A(H)		OF 1	
SIZE		REV	
A3		T6	
		04/11/05	

8 7 6 5 4 3 2 1