

规格书

Specification

类型
Description

Electromagnetic Buzzer

品名
Model name

SNT-1205

Version #	Spec V1.0
制作日期 Date	2017-12-20
准备 Prepared	Yi Shen Acoustic specialist,R&D Dept.
承认 Approved	Qian Baolong Executive Manager,R&D Dept.

1.适用范围：本规范适用于 SNT-1205 蜂鸣器。

This specifications apply the SNT-1205 buzzer.

2.基本规格/General specification

项目/Item	规格/Spec	条件/Condition
1 额定电压 Rated voltage	5	
2 工作电压 Operation voltage	4~7VDC	
3 声压 Sound Pressure Level=SPL	Min 85dB	测试环境：标准状态，标准驱动电路，额定电压
4 平均消费电流 Average consumption current	Max 30mA	测试距离：0.1m
5 振荡频率 Oscillation frequency	2600±300Hz	Standard State,Standard Drive Circuit. Rated voltage,Distance at 0.1m
6 工作温度范围 Range of operation temperature	-20~+70℃	声压 ≥85dB SPL ≥85dB
7 保存温度范围 Range of preservation temperature	-30~+80℃	
8 端子强度 Terminal strength	10N	拉负荷方向的终端轴 Pull load on the direction of the terminal axis
9 外部尺寸 Externals size	Φ12x9.5	参阅附图 Refer to the attached drawing
10 重量 Mass	2g	

☆标准状态：常温（15~35℃），湿度（25~85%相对湿度），空气压力（860~1060hpa）

在假设的情况判断，测试是一基本状态下进行。

Standard State:Ordinary Temp(15~35℃),Humidity(25~85%RH),Air pressure(860~1060hPa)

In case of doubtful judgment,the test is re—performed under Basic State.


☆基本情况：温度。（20±2℃），湿度（60~70%相对湿度），空气压力（860~1060hpa）

Basic State: Temp.(20±2℃),Humidity(60~70%RH),Air pressure(860~1060hPa)

<标准驱动电路>/<Standard Drive Circuit>


<标标测试治具>/<Standard Test Fixture>

Test Method:

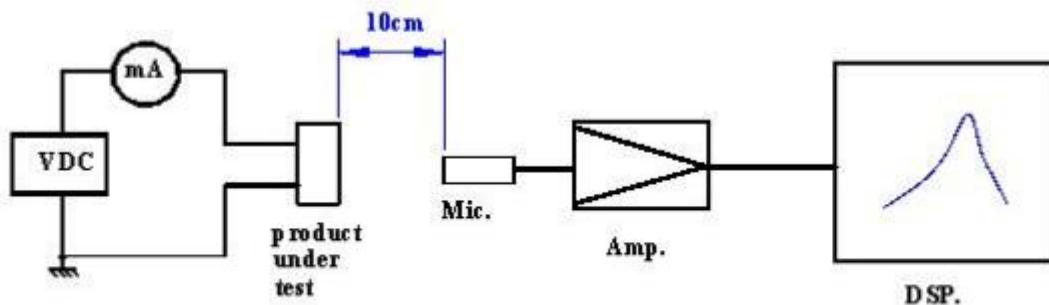

(UNT: mm)

Tolerance: ±0.5mm Except Specified

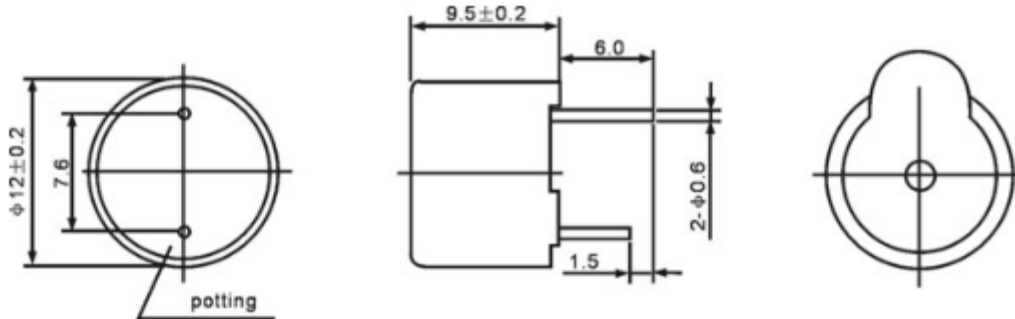

3.可靠性规范 Reliability Specification

项目/Item	试验条件/Test condition	判断标准/Criteria	引用规格
1 高温保存试验 High temperature Preservation	+85℃环境下放置 96 小时 Exposure to +85℃ for 96 hrs.	经过测试，符合规格，没有任何不合格的外观和性能，除了是 80 分贝或以上 (2300±400 Hz)	GB/T 2423.2
2 低温保存试验 Low temperature preservation	-40℃环境下放置 96 小时 Exposure to -40℃ for 96 hrs.	After the test the part shall meet specifications without any degradation in appearance	GB/T 2423.1
3 耐温试验 Thermal Shock	<p>10 次周期 10 cycles</p>	And performance except SPL. SPL shall be 80 dB More. (at 2300±400 Hz)	GB/T 2423.4
4 温湿度试验 Thermal, Humidity Shock	<p>10 cycles</p>		
5 常温寿命试验 Ordinary Temp. Life	常温 (25℃±10℃) 电压 5VDC 连续测试 1000 小时 Driving the sounder at 5VDC for 1000hrs in the room temperature (25℃±10℃)		
6 高温寿命试验 High Temp. Life	高温 (+85℃) 电压 5VDC 连续测试 500 小时 Driving the sounder at 5VDC for 500hrs in the low temperature (+85℃)		
7 低温寿命试验 Low Temp. Life	低温 (-40℃) 电压 5VDC 连续测试 500 小时 Driving the sounder at 5VDC for 500hrs in the low temperature (-40℃)		
8 引脚拉力试验 Lead strength	10N 的拉力在引脚上拉 10±1 秒 Pull load on the direction of the terminal axis for 10±1 sec.		GB/T 2423.29

9	振动试验 Vibration	10~55~10Hz 正弦波测试 1 分钟, 振幅 1.52mm 最大 91m/S ² X, Y, Z 三个方向每个 2 小时总计 6 小时 10~55~10Hz Sinewave, Sweep 1 min, Amplitude 1.52mm Max91m/S ² X, Y, Z 3Direction 2hrs each, Total 6hrs		GB/T 2423.10
10	自由掉落试验 Free drop	70cm 高自由掉落到厚 40mm 的木板上, 每个方向一次 Free drop, 70cm height, on wood board (t40mm) X, Y, Z 3Direction 1time each, total 3times.	排除弯曲的针 Exclude bending of Pin	GB/T 2423.8
11	波峰焊耐热试验 Solder heat resistance	260±2℃焊接温度。浸泡时间 3±0.5sec Soldering into solderbath:Solder Temp. 260±2℃ Soaking Time: 3±0.5sec	经过测试, 符合规格, 没有任何不合格的外观和性能 After the test the part	GB/T 2423.28
12	耐洗性试验 Washability	溶剂: 去离子水, 溶剂温度: 55±5℃, 浸泡时间: 5±0.5 分钟 Solvent:deionized water, Solvent temp:55±5℃ Soaking time:5±0.5minutes	Shall meet specificatio-ns without any degrada-tion in appearance and performance	
13	引脚可焊性试验 Solderability	40℃, 相对湿度 90~95%RH 放置 240 小时, 370±5℃焊接温度。 浸泡时间: 6±0.5sec。 Pretreatment:40℃, 90~95%RH*240hrs Soldering into solderbath:Solder Temp. 370±5℃ Soaking Time: 6±0.5sec	引脚 95%必须覆盖着焊料 95% surface of lead pins must be covered with fresh solder and no soldering holes Should be found	GB/T 2423.28